




COIL INFORMATION

C13 and C16 Series

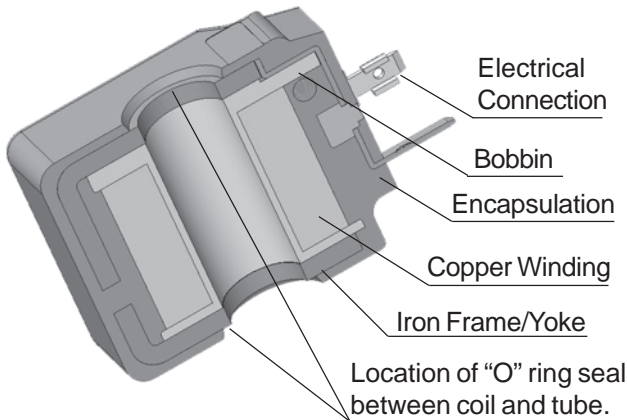

WATTAGE

C13 (for 13 mm tubes) = 14, 22 & 27 Watts
 C16 (for 16 mm tubes) = 19 & 29 Watts

VOLTAGES

Standard

12 VDC 110 VRAC
 24 VDC 220 VRAC

Special/Optional

Other Voltages are available on request


ALTERNATING CURRENT

For AC voltage an ISO4400 rectified connector must be used, as the coils are wound for DC.

The correct connector is available from the factory:

110 VAC = AXP9997-115
 220 VAC = AXP9997-230

VDR is fitted for over-voltage protection.
 Diodes are rated at 1.5 amp.

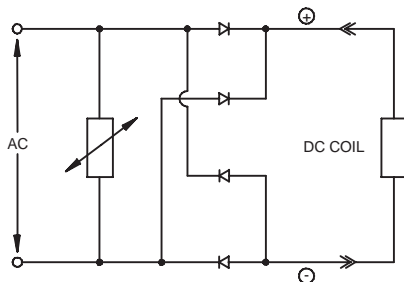

AC Voltage Connector Circuit Diagram

DUTY RATING

The coil is rated for continuous operation at nominal voltage +/- 10% and a ambient range of -20 to +40.

Note. Coil performance, force produced and power consumed, is effected by the heat of the coil, performance figures given in this catalogue are measured under simulated continuous duty conditions at the coil stabilised temperature. It is important to verify the actual conditions the valve will experience for any given application it should be tested in situ to confirm valve selection.

WIRE INSULATION

The coil winding is copper magnet wire insulation equivalent to class N (200°C).

ENCAPSULATION MATERIAL

C13, 14 Watt coils and C16, 19 Watt coils are black in colour and made from PBT (Black Polybutylene Reinforced) equivalent to Class F (155°C)

C13, 22 & 27 Watt coils and C16, 29 Watt coils are black in colour and made from IXEF (Black Polyarylamide Reninforced) equivalent to Class H (180°C)

INGRESS PROTECTION (IP) BS EN 60529

The coil/tube joint is sealed by "O" rings preventing fluid ingress and the possibility of tube corrosion.

Different electrical connectors offer different levels of protection the minimum being the DIN 43650 connector with a gasket at IP65. Integrated Hydraulics offer a wide range of connector types - details of which are available on request.

CONNECTORS

- H = ISO4400 Standard DIN43650
2 pin and earth
- F = Black Flying Leads 1.5mm² wire
600 mm long, 15 AWG, 2.2 mm diameter,
Teflon FEP covered (DC voltage only)
- DM = Deutsch Moulded 2 way DT04-2P series.
(DC voltage only).

Caution – When handling coils after or during use they maybe hot which can cause burning to the skin. Handle with care and use the appropriate equipment.

We reserve the right to change specifications without notice

Integrated Hydraulics Ltd


Collins Road, Heathcote Ind. Est., Warwick, CV34 6TF, UK.
 Tel: +44 (0) 1926 881171 Fax: +44 (0) 1926 315729
 Website: www.integratedhydraulics.com

Integrated Hydraulics Inc

7047 Spinach Drive, Mentor, Ohio 44060, USA
 Tel: (440) 974 3171 Fax: (440) 974 3170
 Website: www.integratedhydraulics.com

C13 Coils

C16 Coils

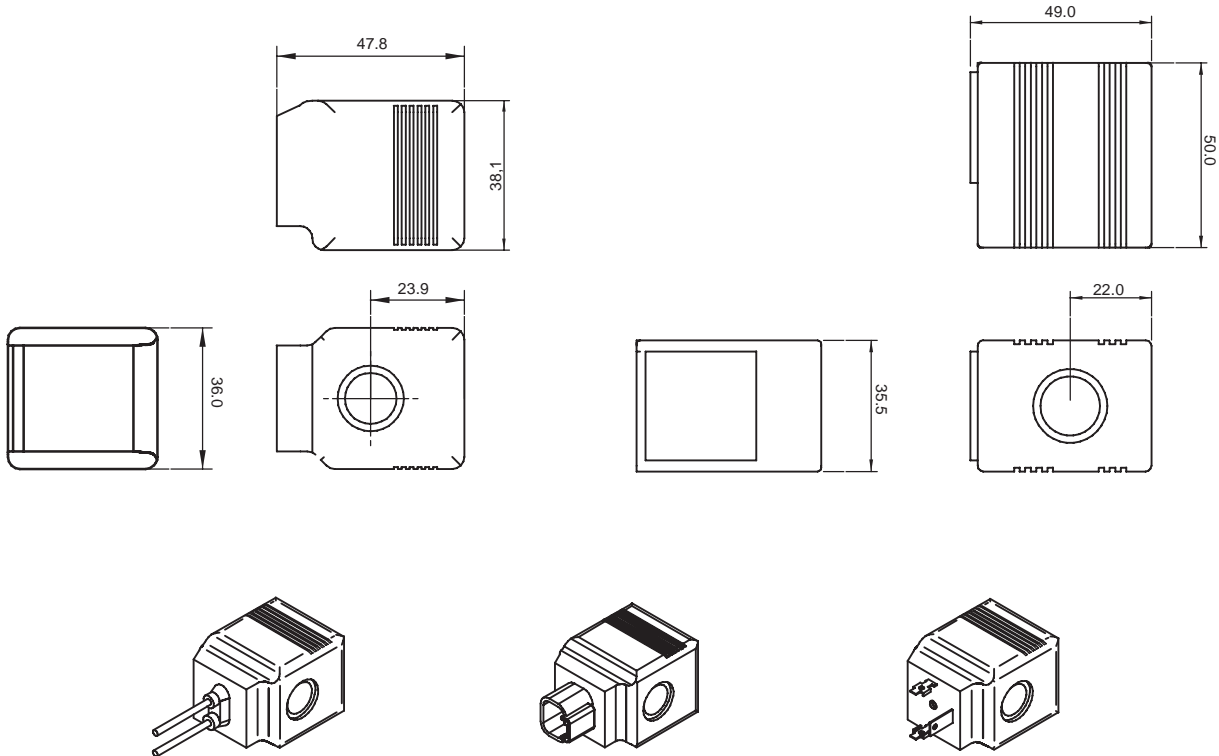

ORDERING CODE EXAMPLE

C16 H 24 19

Coil Series

- 13 = 13 mm tube
- 16 = 16 mm tube

Connection

- H = DIN43650 ISO Standard
 - F = Flying Leads (12 and 24 VDC only)
 - DM = Deutsch Moulded (12 and 24 VDC only)
- (Consult factory for other options)

Wattage

- | | |
|--------------|--------------|
| C13 | C16 |
| 14 = 14 Watt | 19 = 19 Watt |
| 22 = 22 Watt | 29 = 29 Watt |
| 27 = 27 Watt | |

Voltage

- | | |
|-------------|-----------------|
| 12 = 12 VDC | 110 = 110 VRAC |
| 24 = 24 VDC | 220 = 220 VRAC* |
| | *220 to 240 VAC |

All AC coils must be used with a rectifying connector:-
(AXP9997-115 or AXP9997-230)
(Other voltages available on request)